

The rugged PSL siren is a double ended siren, designed to give effective warning over a large area. Suitable for disaster, emergency, evacuation etc.



SKU:063800

FEATURES:

- Outer Casting: Light alloy, powder coated with ZINCSHIELD and top coated with Grey DURALLOY XT powder coat
- Impellers: Light alloy, powder coated with ZINCSHIELD and top coated with Red DURALLOY XT powder coat
- Base Plate: Heat treated light alloy, powder coated with ZINCSHIELD and top coated with Grey DURALLOY XT powder coat
- Nuts & Bolts: Stainless steel
- Motorcasing: Iron coated with CAPA THANE for weather resistance

SPECIFICATIONS:

Dimensions: Height: 42cm Width: 42cm
 Length: 59cm

Weight: 70kg


Range: 8km in still air

Sound Output: 129 Decibels at 1 metre
 Approximately 525Hz

Power Requirements:

Phase: 3 phase 380/415 Volt
 Starting Amps: 46 amps per phase
 Running Amps: 6.5 amps per phase
 Motor Rated: 8 amps (4kW) 5HP

Siren Decibel performance

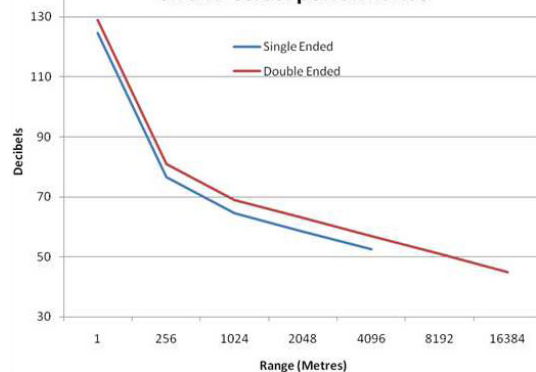

Note: There are many factors that will affect the noise level and range of a siren. Background, wind, structures and terrain can all affect the sound pressure wave. These factors must be taken into account when siting and elevating the siren.

